

Emergency Modular LED Luminaire

Zone 1 Ex emb LED Modular Floodlight / Bulkhead Luminaire



Specification:

Main Body:
Marine Grade Aluminium

Diffuser:
Polycarbonate

Gaskets:
Silicone

External Fasteners:
A4 Stainless Steel

Stirrup Bracket:
316 Stainless Steel

T Rating:
T4

Weight:
9.0kg per module

Key Features:

- Battery backup power provides 3 hours at 50% illumination, 90 minutes at full illumination.
- Modular construction allows the modules to be supplied interlinked with each other to provide greater light output.
- Can be used as a single unit – small floodlight or bulkhead or linked together to replicate a large 250W/400W floodlight.
- Can be supplied in multiple configurations of standard or emergency modules.
- Each module utilises 48 off 1.2W LED's
- Integrated power supply.
- Low power consumption.
- Rugged construction – resistant to vibration.
- Independently photometrically tested.
- All units supplied with 2 cable entries as standard. Additional entries available on request.
- IP66 and IP67.

- Optional wire guard available for extra protection.
- Narrow, Medium, Wide and Extra Wide beam light output available.

In comparison to typical Ex d floodlights:

- 70% less weight.
- 50% less power consumption.
- One man installation.
- LED technology will give a predicted lamp life of 10 years+.
- No light pollution.
- Instant start and restrike.
- No light degradation at low temperatures.
- Penetrating white light.
- Photocell option available.
- No flamepaths to maintain.
- Low cost of installation, operation and maintenance.

Engineering Solutions
Design to Manufacture

HADAR 
LIGHTING

Distributed by:



45 Solomon Road, Jandakot 6164 Western Australia
P: +61 (0) 8 9414 7999 | F: +61 (0) 8 9414 7311
E: sales@pacificex.com.au | W: www.pacificex.com.au

Protection:

II 2GD Ex emb IIC T4 Gb IP66/67, Ex t IIIC T103°C Db

Certification: ATEX & IEC Ex and ABS certified.

	Certification	Ambient	Voltage Range	Certificate
HDL106E	II 2GD Ex emb IIC T4 Gb IP66/67, Ex t IIIC T103°C Db	-20°C to +50°C	100V to 254V AC input	IEC Ex SIR09.0064X SIRA 09ATEX5159X ABS 11-LD801943-PDA

Electrical Specifications:

	Electrical Specification		
Lamp Options	Power consumption	Power factor	Available power supplies
48 x 1.2W LED's	60W Max	0.95	100V – 254V 47/63Hz AC only
96 x 1.2W LED's	120W Max		
144 x 1.2W LED's	180W Max		


Installation:

Terminals: Up to 4mm² terminals for live, neutral, earth and looping are provided. Internal and external earth as standard.
Cable Entries: 2 x M20, one fitted with approved stopper plug, other entries available on request.
Suspension: Via stirrup bracket, other mounting accessories available. Stainless steel eyebolt for safety chain included as standard.
Installation: Installation document AL10698 supplied.

Ordering Matrix:

Field	Options
Product	HDL106
Version (LEDs)	E – Emergency (48 LEDs) ES – Emergency/Standard (96 LEDs) SES – Standard/Emergency/Standard (144 LEDs) (All combinations available)
Beam Pattern (add per module)	N – Narrow M – Medium W – Wide X – Extra Wide
Light	W – Cool White light X – Warm White light Other colours available on request.
Cable Entries	0 – M20 5 – M25
Casting Colour	04 – Colour RAL 7035 (Grey)
Other Options	H – Horizontal (available on single units only)

Dimensions:

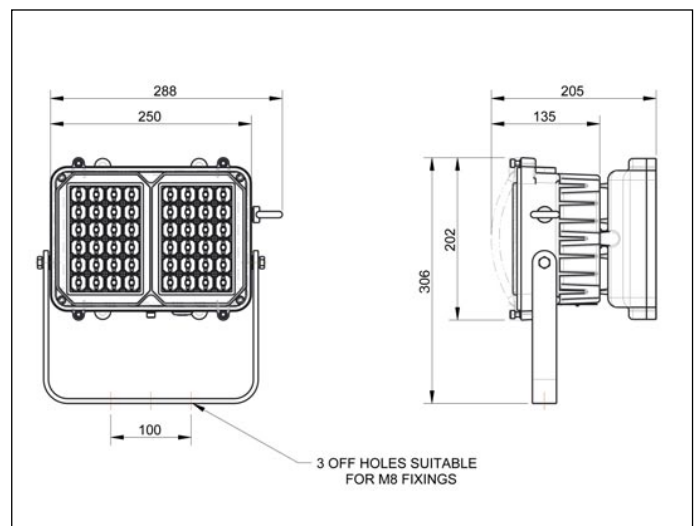

Weight:
48 LED Luminaire: 9kg
96 LED Luminaire: 15-18kg
144 LED Luminaire: 21-27kg

Notes:
1) Typical ordering reference HDL106EEEEMMMW004.
2) Photometric Data available from the website or contact sales office.

